

MICHELIN® X® TWEEL® TURF™

The Airless Radial Tire™ & wheel assembly.
Designed for use on zero turn radius mowers.




- ✓ NO MAINTENANCE
- ✓ NO COMPROMISE
- ✓ NO DOWNTIME

MICHELIN® X® TWEEL® TURF™

No Maintenance – MICHELIN® X® TWEEL® TURF™ is one single unit, replacing the current tire/wheel/valve assembly. Once they are bolted on, there is no air pressure to maintain, and the common problem of unseated beads is completely eliminated.

No Compromise – MICHELIN X TWEEL TURF has a consistent hub height which ensures the mower deck produces an even cut, while the full-width poly-resin spokes provide excellent lateral stability for outstanding side hill performance. The unique design of the spokes helps dampen the ride for enhanced operator comfort, even when navigating over curbs and other bumps. High performance compounds and an efficient contact patch offer a long wear life that is two to three times that of a pneumatic tire at equal tread depth.

No Downtime – MICHELIN X TWEEL TURF performs like a pneumatic tire, but without the risk and costly downtime associated with flat tires and unseated beads.

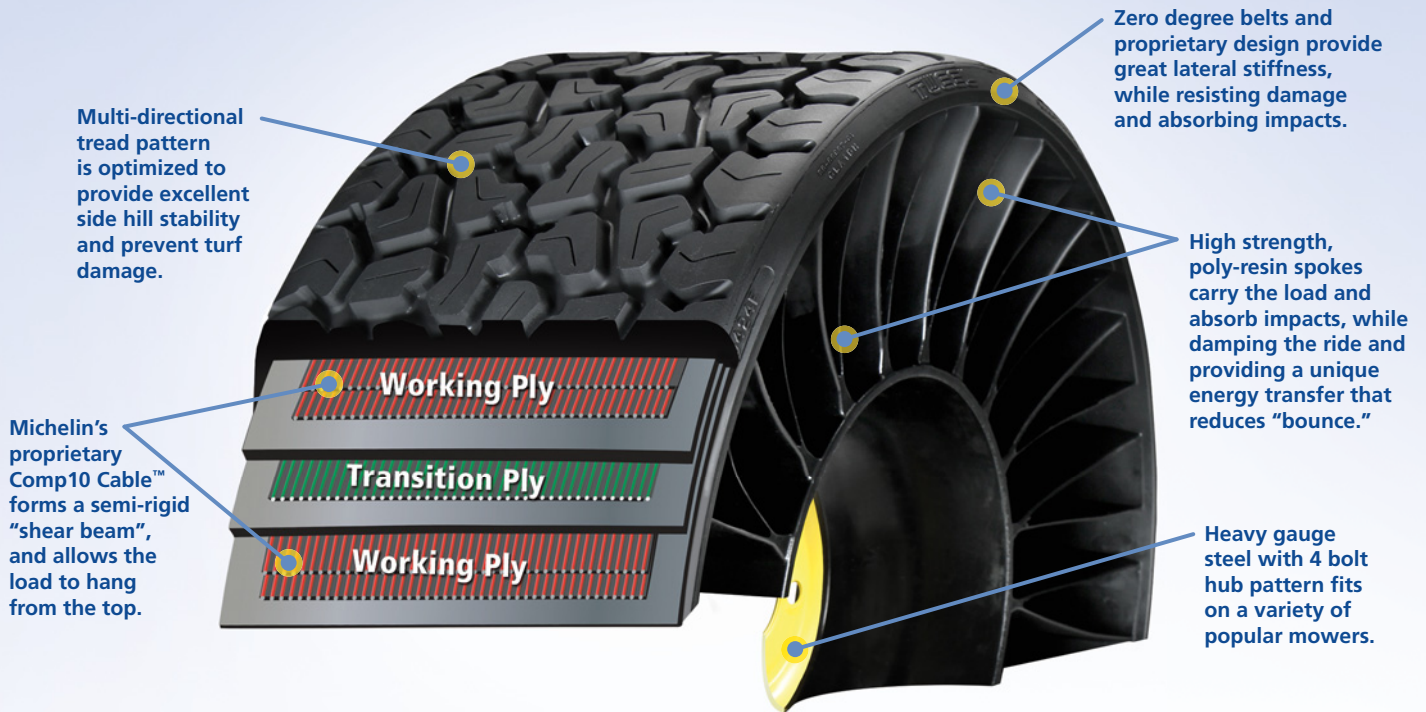

MSPN	Mower Deck	Wheel Offset	Max Load	Max Speed	Section Width	O.D.	Rolling Circum.	Rev/ Mile	Static Loaded Radius (700 lbs)	Contact Area (in²)	Tread Depth (32nds)	Undertread (32nds)	Weight (lbs.)
34682	54" / 60"	-0.75"	750 lbs.	16 mph	10.7"	23.4"	70.4"	900	11.0"	41.5	12	4	47.7
42568	72"	-2.2"	750 lbs.	16 mph	10.7"	23.4"	70.4"	900	11.0"	41.5	12	4	48.2

NOTE: Product measurements are subject to change and are listed here for your convenience. Please see your MICHELIN representative for up-to-date data.

USA
 Michelin North America, Inc.
 One Parkway South
 Greenville, SC 29615
 1-888-622-2306

Canada
 Michelin North America (Canada), Inc.
 2500 Daniel Johnson, Suite 500
 Laval, Quebec H7T 2P6
 1-888-871-4444

Mexico
 Industrias Michelin, S.A. de C.V.
 Av. 5 de febrero No. 2113-A
 Fracc. Industrial Benito Juarez
 7 6120, Querétaro, Qro. Mexico
 011 52 442 296 1600

www.michelintweel.com

